

Vestax DF-17^{V2}PRO KIT

ROTARY INPUT FADER KIT

INSTALLATION MANUAL

Head Office

1-18-6 Wakabayashi, Setagaya-ku, Tokyo 154-0023 Japan
Web: <http://www.vestax.com/>

Vestax Global Support

csg@vestax.jp



Vestax Europe Support

info@vestax.net

Thank You for purchasing the Vestax Original Service Parts. Replacement parts only qualified expert. Please read this install manual carefully with SVM Vestax before installation this part for unit.

Note



This DF KIT allows variable settings. Check the zero position before installation. The zero position can be reversed. We do this by loosening the lock nut M9 x 0,7 and next step turn the PCB board with ALPS potentiometer with the 180 degrees.

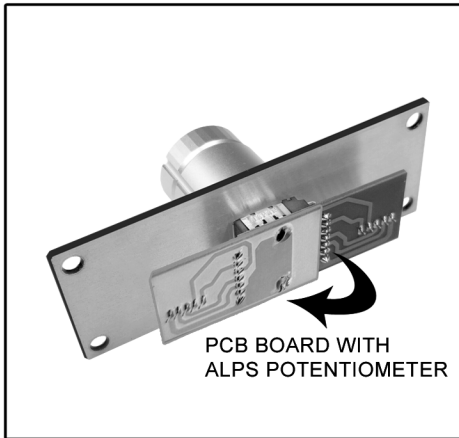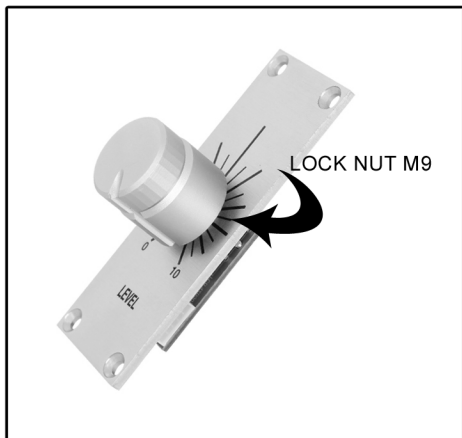


HOW TO CHANGE THE INPUT FADER UNIT

■ Change IF-17 SLIDE FADER to DF-17

- ① Re1.Remove the fader knobs. (See fig-a)
- ② Remove the 4 screws which fix the input fader panel to the mixer.
- ③ Remove the unit IF and reconnect all multi-cables connectors (See fig-d)
- ④ Insert the unit DF and connect all multi-cables connectors and fix the unit with 4 screws the input panel to the mixer (See fig-c/b)
- ⑤ Replace the fader unit making sure that the connector wires are securely fastened before carefully positioning the fader unit and affixing with screws.

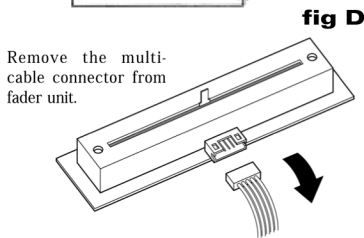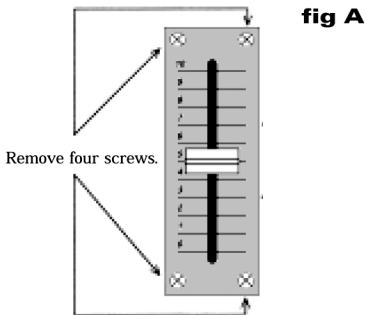

Note

Use a plus driver fitting screw.
Caution: When you change any parts, do not loose the screws with  marking.

SAFETY WARNING

BEFORE REPLACING THIS PART DISCONNECT THE DEVICE FROM THE POWER SUPPLY REFER SERVICING TO QUALIFIED SERVICE PERSONNEL		
	CAUTION RISK OF ELECTRIC SHOCK DO NOT OPEN	

The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.



TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE.

NOTE

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures.

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE

Changes or modifications may cause this unit to fail to comply with Part 15 of the FCC Rules and may void the user's authority to operate the equipment.