

# Vestax CF-300

CROSS FADER UNIT FOR VCI-300 / VCI-300MkII

## INSTALLATION MANUAL

### Head Office

1-18-6 Wakabayashi, Setagaya-ku, Tokyo 154-0023 Japan  
Web: <http://www.vestax.com/>

### Vestax Global Support

csg@vestax.jp

### Vestax Europe Support

cse@vestax.jp

Thank you for purchasing the Vestax Replacement Fader unit.

Please read this install manual carefully with the VCI-300's owner's manual before installation.


### ACCESSORIES

Please check all items listed below are included.

CROSS FADER UNIT FOR VCI-300 / VCI-300MkII

### ●HOW TO REMOVE CROSS FADER UNIT


- ① Remove knobs for cross fader (2pcs in total) from the VCI-300 (see fig.a)

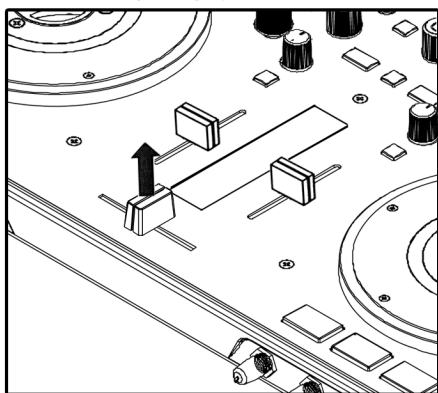

<fig.a>


- ② Remove the 4 screws which fix the bottom cover of the VCI-300 as fig.b.

※When the VCI-300 is placed upside down, the pots may be pushed down and damaged. Please apply a cushion or soft surface under the VCI-300 unit for protecting for the pots.

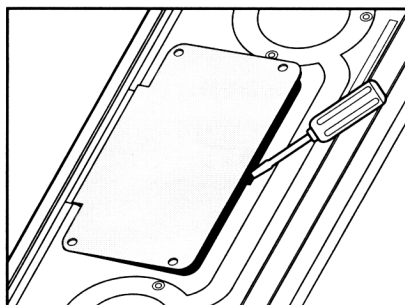


<fig.b>


※When removing the bottom cover, use a flathead screwdriver as fig.c to gently prise open the bottom cover.

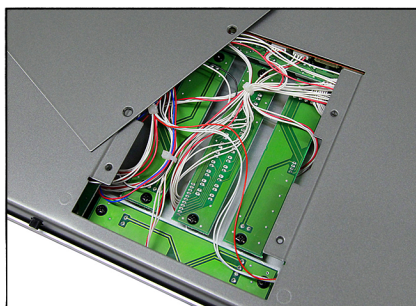

<fig.c>




- ③ Carefully disconnect the multi-cable connector from the cross fader unit. (see fig.d)

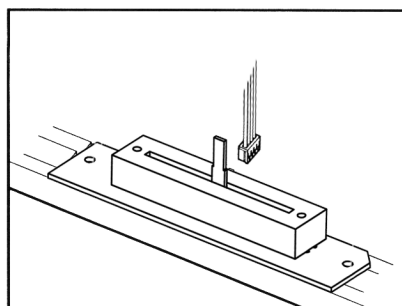

<fig.d>

- ④ Remove the 2 screws which fix the cross fader unit, and remove the fader unit from the position in the VCI-300 (see fig.e)

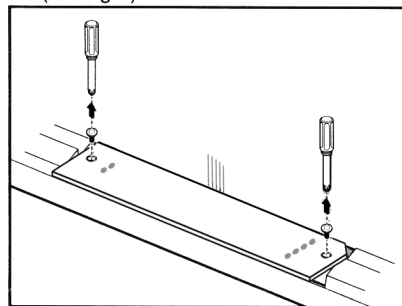

<fig.e>

※Please take care not to put pressure on the wires.

### ●HOW TO ATTACH CROSS FADER UNIT CF-300

- ⑤ Replace the old CF-300 with the new CF-300. Tighten the 2 screw.
- ⑥ Connect the wire that was disconnected on ③ to the connector of the new CF-300.
- ⑦ Close the bottom cover and tighten the 4 screws.

<NOTE> Please take care that the wires are not trapped between the removable panel and the case, or that the wires are trapped otherwise as the wires may be pinched, or snap.

- ⑧ Attach the knobs for crossfader (1pcs in total) to the VCI-300.