

Vestax CF-400

CROSS FADER UNIT FOR VCI-400

INSTALLATION MANUAL

Head Office

1-18-6 Wakabayashi, Setagaya-ku, Tokyo 154-0023 Japan
Web: <http://www.vestax.com/>

Vestax Global Support

csg@vestax.jp

Vestax Europe Support

cse@vestax.jp

Thank you for purchasing the Vestax CF-400, Replacement Cross Fader unit.
Please read this install manual carefully with the VCI-400's owner's manual before installation.

ACCESSORIES

Please check all items listed below are included.

CROSS FADER UNIT "CF-400"


Screw×2pcs



HWY11
VCI-400 Cross Fader PCB
S2K11002HPC
05/10/11

●HOW TO REMOVE FADER UNIT "CF-400"


- ① Remove knobs for input fader and cross fader (5pcs in total) from the VCI-400. (see fig.a)

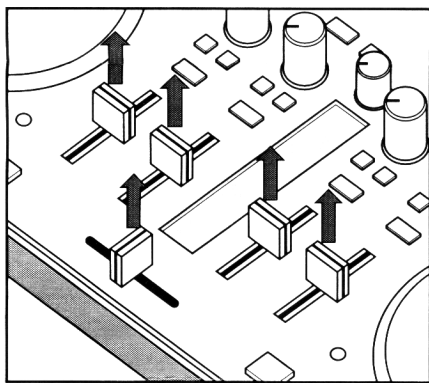

<fig.a>


- ② Remove the 5 screws which fix the bottom cover of the VCI-400 as fig.b.

※When the VCI-400 is placed upside down, the pots may be pushed down and damaged. Please apply a cushion or soft surface under the VCI-400 unit for protecting for the pots.

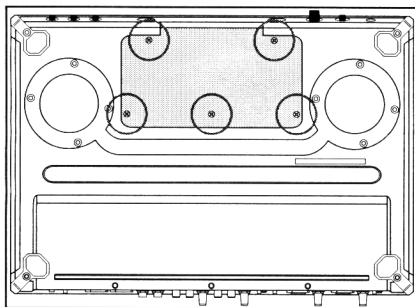


<fig.b>

※When removing the bottom cover, use a flathead screwdriver as fig.c to gently prise open the bottom cover.

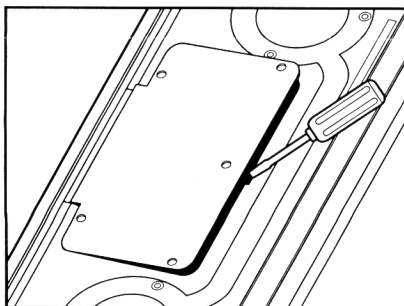


<fig.c>

- ③ Carefully disconnect the multi-cable connector from the cross fader unit. (see fig.d)

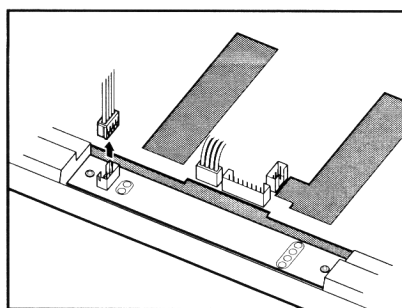

<fig.d>

- ④ Remove the 2 screws which fix the cross fader unit, and remove the fader unit from the position in the VCI-400. (see fig.e)

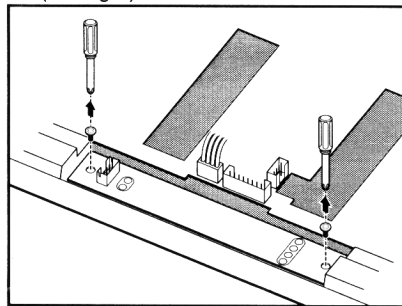

<fig.e>

※Please take care not to put pressure on the wires.

●HOW TO ATTACH FADER UNIT "CF-400"

- ⑤ Replace the old CF-400 with the new CF-400.
Tighten the 2 screws.
⑥ Connect the wire that was disconnected on ③ to the connector of the new CF-400.
⑦ Close the bottom cover and tighten the 5 screws.

<NOTE> Please take care that the wires are not trapped between the removable panel and the case, or that the wires are trapped otherwise as the wires may be pinched, or snap.

- ⑧ Attach the knobs for input fader (4pcs in total) to the VCI-400.